

STAIR NOSINGS – 1428 RANGE



Advance Anti-Slip Surfaces Pty Ltd is leading the way with a range of stair nosings specifically designed to comply with the requirements of Australian Standard® AS1428.1 – 2009. Design for Access and Mobility.



DIMENSIONS (mm)				PRODUCT CODE	
A*	x	B*	x	C*	
600	x	50	x	10	SN6005010
750	x	50	x	10	SN7505010
900	x	50	x	10	SN9005010
1200	x	50	x	10	SN12005010
600	x	75	x	10	SN6007510
750	x	75	x	10	SN7507510
900	x	75	x	10	SN9007510
1200	x	75	x	10	SN12007510

CUSTOM MADE SIZES AVAILABLE ON REQUEST

Universal Clamp

AASUNICLAMP

* Stair nosing range complies with the width and depth requirements set out in Australian Standard AS1428.1 - 2009.

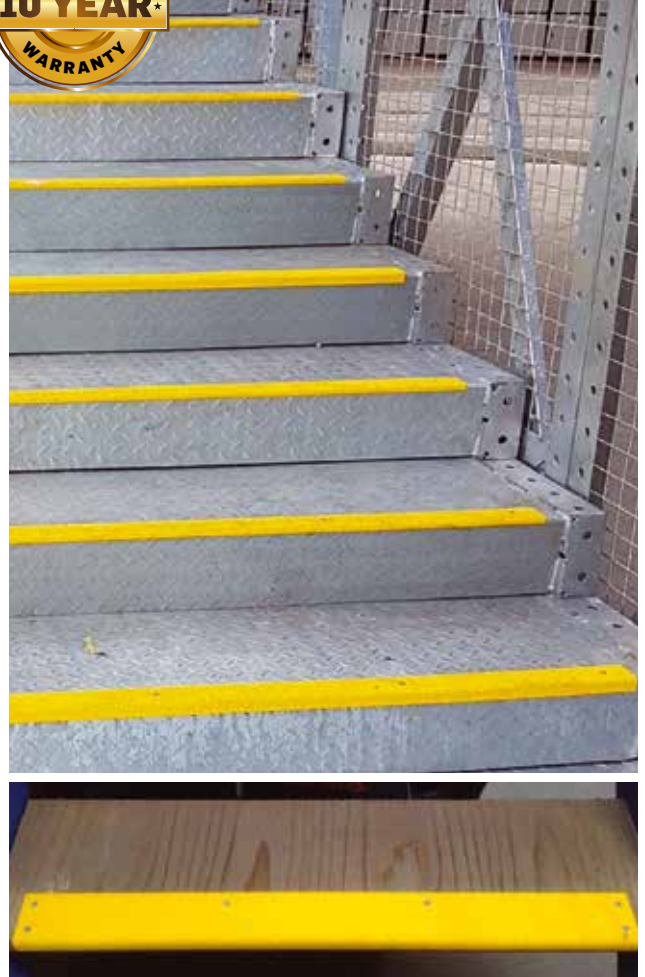

Advance Anti-Slip products are designed to suit commercial and industrial applications. Testing completed is to AS 4586 - 2013 and is compliant to the Building Code of Australia (BCA) / National Construction Code (NCC).


SPECIFICATIONS

- QUALITY:** Class One
- PROFILE:** Single Bend
- GRADE:** Heavy Duty – R13 (more grades available)
- FOUNDATION:** Galvabond (more foundations available)
- COLOUR:** Safety Yellow (more colours available)
- AGGREGATE:** Silicone Carbide
- PRE-DRILLED HOLES:** Available as required

Contrasting nosing strips are required to be not less than 50mm and not more than 75mm on the tread/ going and when located at the front edge of a stair cannot extend down the riser more than 10mm.

Stair nosing shall have a minimum luminance contrast of 30% to the background stairway.

A stairway is deemed to be two (or more) continuous steps.

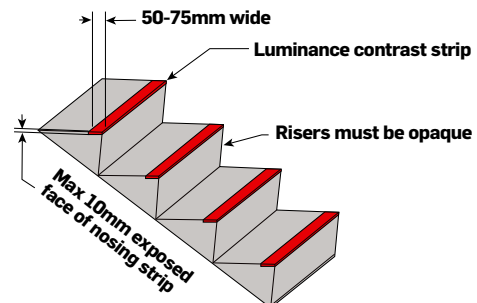

ADVANCE ANTI-SLIP SURFACES Pty. Ltd.

6A Aristoc Road, Glen Waverley 3150, Victoria, Australia

P: +61 3 9560 4488 F: +61 3 9562 0449 E: sales@advanceantislip.com

www.advanceantislip.com

